
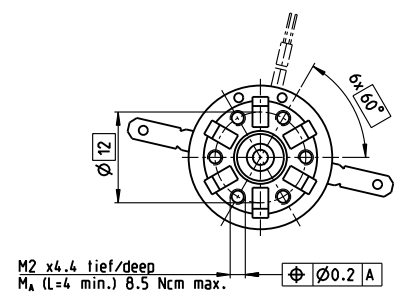
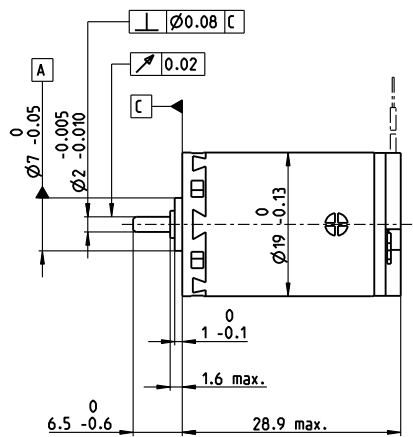


A-max 19 Ø19 mm, precious metal brushes CLL, 2.5 watt

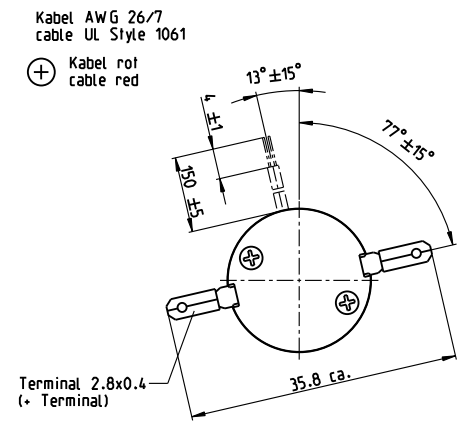

A-max

M 1:1

- Stock program
- Standard program
- Special program (on request)

Part numbers									
with terminals	110081	110082	110083	110084	110085	110086	110087	110088	110089
with cables	139828	202411	352922	202412	352923	233453	238388	267427	235373

Motor data										
Values at nominal voltage										
1 Nominal voltage	V	1.5	3.6	4.5	6	9	12	15	18	24
2 No load speed	rpm	8040	10800	9420	7790	9220	10300	10300	9300	8870
3 No load current	mA	78	52.9	33.6	18.6	16.2	14.6	11.7	8.25	5.73
4 Nominal speed	rpm	6840	8080	5710	4000	5470	6510	6500	5380	4900
5 Nominal torque	mNm	1.35	2.48	3.61	3.59	3.59	3.49	3.48	3.42	3.39
6 Nominal current (max. continuous current)	A	0.84	0.84	0.83	0.51	0.403	0.33	0.264	0.195	0.138
7 Stall torque	mNm	7.79	9.43	9	7.36	8.83	9.47	9.45	8.16	7.63
8 Stall current	A	4.44	3.02	2.01	1.02	0.963	0.867	0.692	0.45	0.301
9 Max. efficiency	%	76	76	76	76	76	76	76	76	75
Characteristics										
10 Terminal resistance	Ω	0.338	1.19	2.24	5.88	9.34	13.8	21.7	40	79.7
11 Terminal inductance	mH	0.019	0.059	0.121	0.314	0.506	0.719	1.12	1.98	3.87
12 Torque constant	mNm/A	1.76	3.12	4.49	7.22	9.17	10.9	13.7	18.1	25.4
13 Speed constant	rpm/V	5440	3060	2130	1320	1040	874	699	526	377
14 Speed/torque gradient	rpm/mNm	1050	1170	1060	1080	1060	1110	1110	1160	1180
15 Mechanical time constant	ms	27.9	25.4	24.3	24.2	24.1	24.2	24.3	25	24.6
16 Rotor inertia	gcm ²	2.54	2.07	2.18	2.14	2.16	2.09	2.09	2.06	1.99

Specifications

Thermal data

- 17 Thermal resistance housing-ambient 21.3 K/W
- 18 Thermal resistance winding-housing 10.5 K/W
- 19 Thermal time constant winding 11 s
- 20 Thermal time constant motor 201 s
- 21 Ambient temperature -30...+65°C
- 22 Max. winding temperature +85°C

Mechanical data (sleeve bearings)

- 23 Max. speed 16 000 rpm
- 24 Axial play 0.05 - 0.15 mm
- 25 Radial play 0.012 mm
- 26 Max. axial load (dynamic) 1 N
- 27 Max. force for press fits (static) 80 N
- 28 Max. radial load, 5 mm from flange 2.7 N

Operating range

n [rpm]

M [mNm]

I [A]

Comments

- Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient = Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- Assigned power rating**

Mechanical data (ball bearings)		Modular system		Details on catalog page 48	
23 Max. speed	16000 rpm	Gear 418_GP 19 B 420_GP 22 A 421_GP 22 C 452_GS 24 A 472_GP 22 S 473_GP 22 S		Motor Control 550_ESCON Module 24/2 550_ESCON 36/2 DC 557_ESCON2 Nano 24/2	
24 Axial play	0.05 - 0.15 mm				
25 Radial play	0.025 mm				
26 Max. axial load (dynamic)	3.3 N				
27 Max. force for press fits (static)	45 N				
28 Max. radial load, 5 mm from flange	11.9 N				
Other specifications					
29 Number of pole pairs	1				
30 Number of commutator segments	9				
31 Weight of motor	33 g				
CLL = Capacitor Long Life					

Values listed in the table are nominal.
Explanation of the figures on page 94.

Option
Ball bearings in place of sleeve bearings
Without CLL